


## 4-Port Weather-Resistant Switch

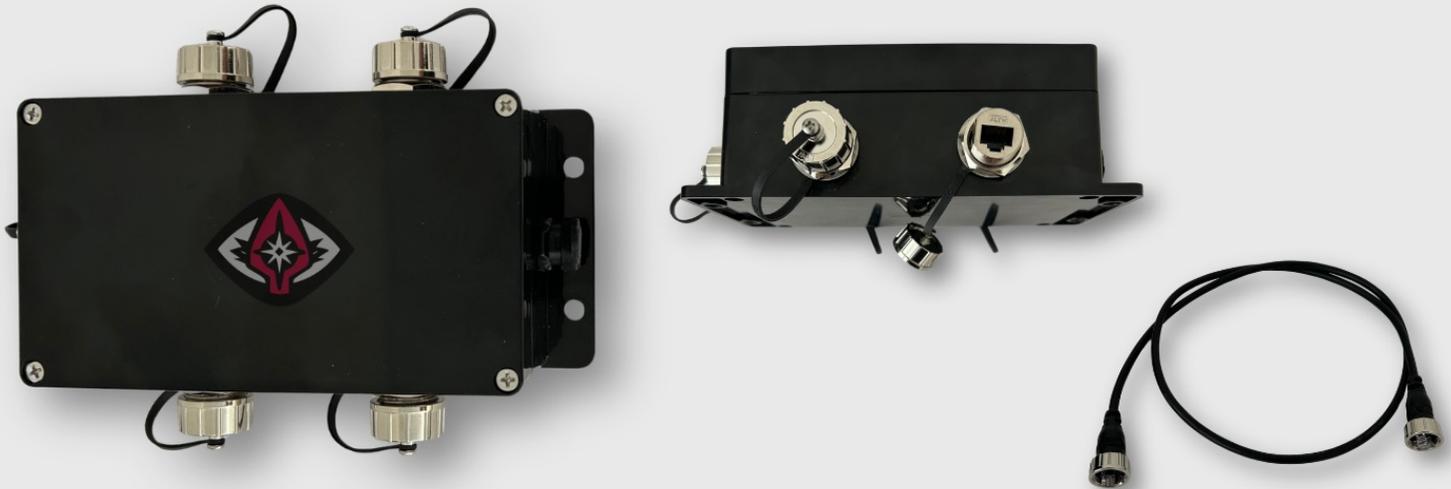

**NDAA-Compliant Unmanaged Switch for Austere Operations**

### Features and Capabilities:

<b>Voltage Input</b>	5V to 60V DC
<b>Power Interface</b>	Sealed USB Amphenol Connector
<b>Power Consumption</b>	1W Idle, 4W at full data rate
<b>Number of Ports</b>	4 X 10/100/1000BASE-T
<b>Port Interface</b>	Sealed Ethernet Amphenol Connector
<b>Supported Protocols</b>	10/100/1000BASE-T
<b>Size</b>	7.5" (L) X 3.5" (W) X 2.5" (H)
<b>Operating Temperature</b>	-50° C to +100° C
<b>Enclosure Material</b>	Impact-resistant ABS

\*Attachment for integration with Bryodyn TIGs available

